



ACHILLES RIVERBOATS




ACHILLES RIVERBOATS

Achilles Riverboats meet the challenge of any river adventure you can imagine—whether you're a professional outfitter or a serious individual river-runner.

Achilles riverboats have met the test on rivers from America's Western giants to the treacherous Nile. They are the toughest in the world, the most abrasion-resistant, the most resistant to ultra-violet rays and ozone damage, and the most puncture-resistant.

Achilles has combined the world's most advanced inflatable craft technology with the expertise of top river runners everywhere to produce rafts that provide every edge on the river. Achilles river boats are constructed with extra-heavy duty nylon fabric impregnated with 80% Hypalon.

Super-strong floor patches add extra protection to potential prime abrasion areas of the floor. Our seams are the strongest possible, too—reinforced with special tape inside and out. Even our D-rings are specially designed, reinforced into heavy duty nylon-supported molded rubber. Achilles puts everything into their rafts in the factory so that you can get everything out of them on the river.

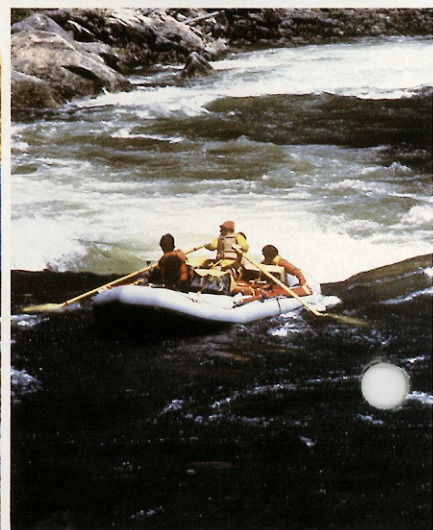

RV SERIES MEETING THE PROFESSIONAL'S DEMANDS

The rugged RV series offers professionals a line of rafts from 8'4" to 20' to meet any demand. RV riverboats come with floors which wrap up to a heavy rubbing strake on the side of the raft for maximum hull and buoyancy tube protection.

The RV line is designed for big water with extra large tube diameter and frame capacity. The RV-S models are designed for paddling and shallow water. All RV rafts have 1260 denier floors and 840 denier tubes.




RV-84

Length	8'4"
Beam	4'3"
Tube Diameter	13"
Thwart Diameter	10"
Weight	75 lbs.
No. Air Chambers	2 + 1 thwart
Stainless "D" Rings	5 - 2" rings



RV-110

Length	11'
Beam	5'4"
Tube Diameter	15.5"
Thwart Diameter	11.8"
Weight	90 lbs.
No. Air Chambers	3 + 2 thwarts
Stainless "D" Rings	11 - 2" rings
Between Thwarts	2'5"

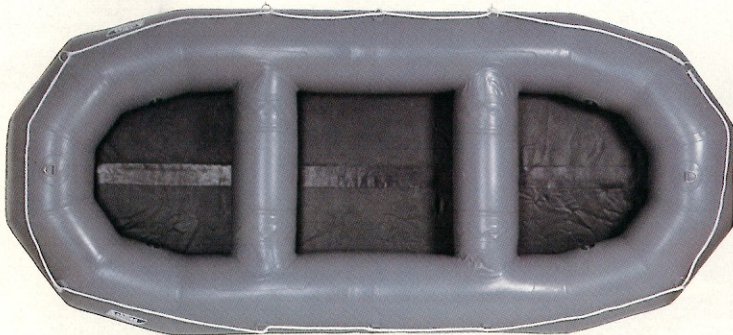

RV-120 RV-130

Length	12'	13'
Beam	5'10"	6'1"
Tube Diameter	17"	18"
Thwart Diameter	11.8"	13.7"
Weight	101 lbs.	127.7 lbs.
No. Air Chambers	3 + 2 thwarts	4 + 2 thwarts
Stainless "D" Rings	11 - 2" rings	11 - 2" rings
Between Thwarts	2'10"	2'11"

The RV-110 and RV-120 are available in optional one-thwart models. All RV models (except RV-84) are available in both red and grey.



RV-140

RV-140 RV-140S


Length	14'	14'
Beam	6'8"	6'8"
Tube Diameter	20"	18"
Thwart Diameter	15.7"	15"
Weight	154.2 lbs.	132 lbs.
No. Air Chambers	4 + 2 or 3 thwarts	4 + 2 or 3 thwarts
Stainless "D" Rings	4 - 3" rings 7 - 2" rings	4 - 3" rings 7 - 2" rings
Between Thwarts	3'7" (2 thwarts) 1'5" (3 thwarts)	3'7" (2 thwarts) 1'5" (3 thwarts)



RV-160

RV-160 RV-160S

Length	16'	16'
Beam	7'6"	7'6"
Tube Diameter	23"	20"
Thwart Diameter	16.5"	15.7"
Weight	125 lbs.	167 lbs.
No. Air Chambers	4 + 2 or 3 thwarts	4 + 2 or 3 thwarts
Stainless "D" Rings	4 - 3" rings 7 - 2" rings	4 - 3" rings 7 - 2" rings
Between Thwarts	3'9" (2 thwarts) 1'10" (3 thwarts)	3'9" (2 thwarts) 1'10" (3 thwarts)

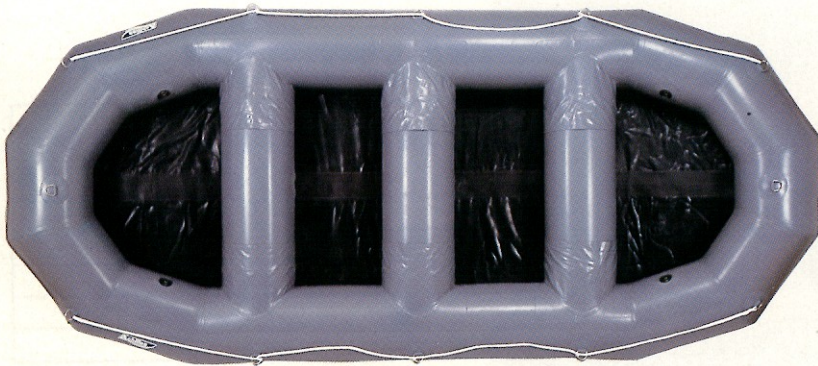

RV-160S Three Thwart

The large RV boats are all available in standard two or three thwart models. Three thwarts enable the seating of more people. The RV-200 is also available in the three-thwart standard or four-thwart optional model. A 22' RV is available at outfitter request.

RV-180

RV-180S

RV-200

Length	18'	18'
Beam	8'	8'
Tube Diameter	24"	21"
Thwart Diameter	17.5"	17.5"
Weight	231 lbs.	194 lbs.
No. Air Chambers	4 + 2 or 3 thwarts	4 + 2 or 3 thwarts
Stainless "D" Rings	4 - 3" rings 11 - 2" rings	4 - 3" rings 7 - 2" rings
Between Thwarts	4' (2 thwarts) 2' 2" (3 thwarts)	4' 2" (2 thwarts) 2' 4" (3 thwarts)

Length	20'
Beam	8'
Tube Diameter	24"
Thwart Diameter	17.5"
Weight	254 lbs.
No. Air Chambers	4 + 3 or 4 thwarts
Stainless "D" Rings	4 - 3" rings 11 - 2" rings



RV-180



SV SERIES MEETING THE PERSONAL CHALLENGE

This tough, lightweight SV series is designed for personal as well as professional use. From 9'6" to 15'6" models, these river rafts are constructed with the same tough 840 denier fabric and Hypalon concentration as the RV series. The ideal riverboat to meet any personal challenge.




SV-96

Length	9'6"
Beam	4'9"
Tube Diameter	14.9"
Thwart Diameter	9.8"
Weight	55 lbs.
No. Air Chambers	3 + 2 thwarts
Stainless "D" Rings	9 - 2" rings
Between Thwarts	2'3"



SV-110

Length	11'
Beam	5'2"
Tube Diameter	15.3"
Thwart Diameter	11.8"
Weight	66 lbs.
No. Air Chambers	3 + 2 thwarts
Stainless "D" Rings	9 - 2" rings
Between Thwarts	2'5"

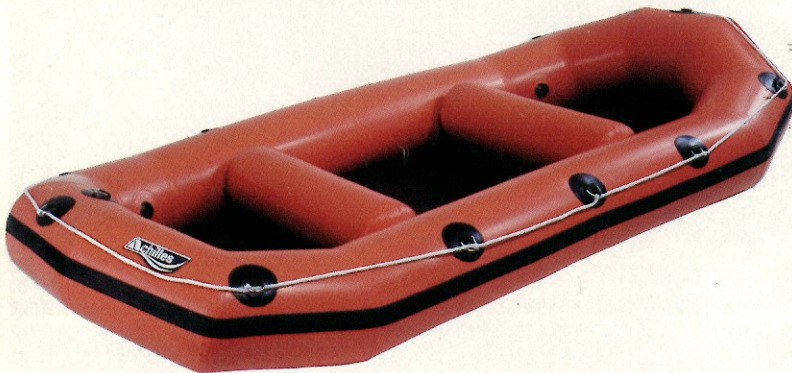

SV-126

Length	12'6"
Beam	5'10"
Tube Diameter	16.9"
Thwart Diameter	11.8"
Weight	88 lbs.
No. Air Chambers	3 + 2 thwarts
Stainless "D" Rings	12 - 2" rings
Between Thwarts	3'3"



SV-140 SV-156

Length	14'	15'6"
Beam	6'8"	7'
Tube Diameter	19.6"	20.8"
Thwart Diameter	15.7"	16.5"
Weight	116.7 lbs.	160.7 lbs.
No. Air Chambers	4 + 2 thwarts	4 + 2 thwarts
Stainless "D" Rings	13 - 2" rings	13 - 2" rings
Between Thwarts	3'7"	3'5"

SV-96 and SV-110 are available w/or w/out oarlocks.
The SV-156 has a wrap-up floor as standard equipment.
All SV models come in red.


OPTIONAL ACCESSORIES



3" stainless steel "D" rings



aluminum core plastic oars for paddling



lock-type oarlocks for easy rowing of small rafts with no chance of losing oars



1" and 2" stainless steel "D" rings



large size foot-bellows for fast on-site inflation



motor mount for small outboards—fitted by Achilles

STANDARD FEATURES


MATERIAL:

Achilles Riverboats are made with safety in mind using the strongest material possible. Extra heavy duty nylon for strength is impregnated and coated with Hypalon to achieve superior resistance to oils, grease, abrasion, heat, flame, chemicals, ozone, sunlight and weathering.

The percentage of Hypalon and the material density used in our skin is very high. This extends life expectancy considerably, giving maximum protection against abrasion and tears.



Inflation Valves recessed high-volume military-type, rust proof metal, one for each chamber and thwart, quick and easy inflation and deflation.

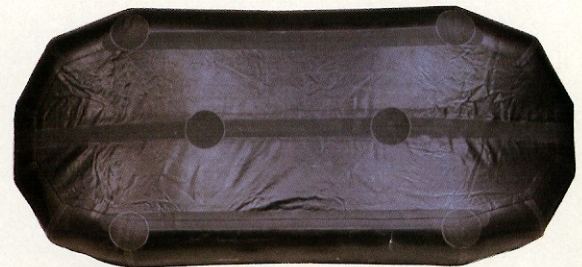


Floor Safety Patches add double protection to potential prime abrasion areas of floor.




Wrap-up Floor (RV and SV-156 Models)

is wrapped up to a heavy rubbing strake to add double protection for side of buoyancy tubes against sharp rocks, wood splinters and the like. Insures MAXIMUM Hull protection and passenger safety.




Standard Floor (SV Models) covers side of buoyancy tubes 30 degrees more than any other brand for added hull protection.

Compartmentalized Hull: multiple air chambers are independent and separated using newly designed high pressure resistant bulkheads (baffles) for the maximum in safety and dependability.

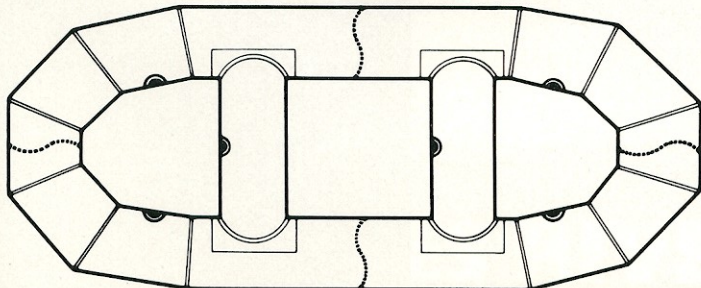

Thwart Fitting Points not exposed, covered and protected by rubber material which gives passengers more comfort and reinforces seats.



Stainless Steel "D" Rings (2" and 3" Width) are reinforced into heavy duty nylon supported molded rubber. Attached are poly-propylene grab lines for easy lifting and passenger access. "D" rings also useful when outfitting rowing frames.

Limited Warranty You will find a warranty certificate and return post registration card included with your Achilles Inflatable Craft. Please fill in the required details and send the registration card to Achilles Inflatable Craft, Division of KOHKOKU USA, Inc. within 15 days of purchase. Do not forget to mention the hull identification number of your craft.

All other express statutory and implied warranties, including, without limitation, all implied warranties or merchantability, are hereby disclaimed.


The specifications of Achilles boats, equipment and accessories may change without notice.



**ACHILLES
INFLATABLE CRAFT**

Division of KOHKOKU USA, Inc.
390 Murray Hill Parkway, East Rutherford,
New Jersey 07073 U.S.A.
Phone: (201) 438-6400
(212) 725-5755
Telex: 133581 ACHILES ERFD
1407 80th Street, S.W.
Everett, WA 98204 U.S.A.
Phone: (206) 353-7000
Telex: 32-9661 KOHKOKUUSA EVT

Authorized Dealer

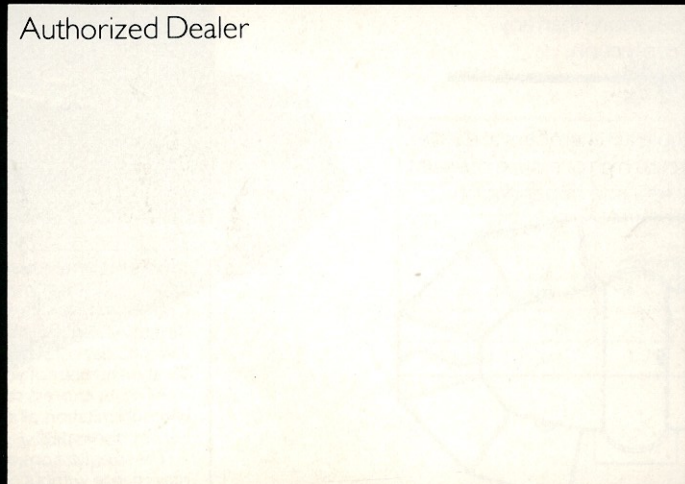

Achilles

Manufacturer and Parent Company
KOHKOKU CHEMICAL IND. CO., LTD.
Achilles Shintomi Annex
No. 12-10 Shintomi 1-chome
Chuo-ku, Tokyo 104
Phone: (03) 552-1523
Telex: J26769 ACHILLES
Cable Address:
ACHILLESCHUO